


**NOTES:**

1. DIMENSIONS WITH "\*" INDICATE COVER REMOVAL ALLOWANCE
2. THE INTERFACE PROVIDED FOR MOUNTING THE ACTUATOR ONTO THE VALVE SHOULD CONFORM TO GOOD ENGINEERING PRACTICES, ENSURING ADEQUATE TOLERANCES, THREAD ENGAGEMENT, SCREW TORQUES, SIZES, MATERIALS & FORM TOLERANCES.
3. UNIT WEIGHT 18KG (40 LBS)
4. CENTRE OF GRAVITY DIMENSIONS HAVE A TOLERANCE OF ± 20mm
5. ACTUATOR SHOWN IN CLOSED POSITION.

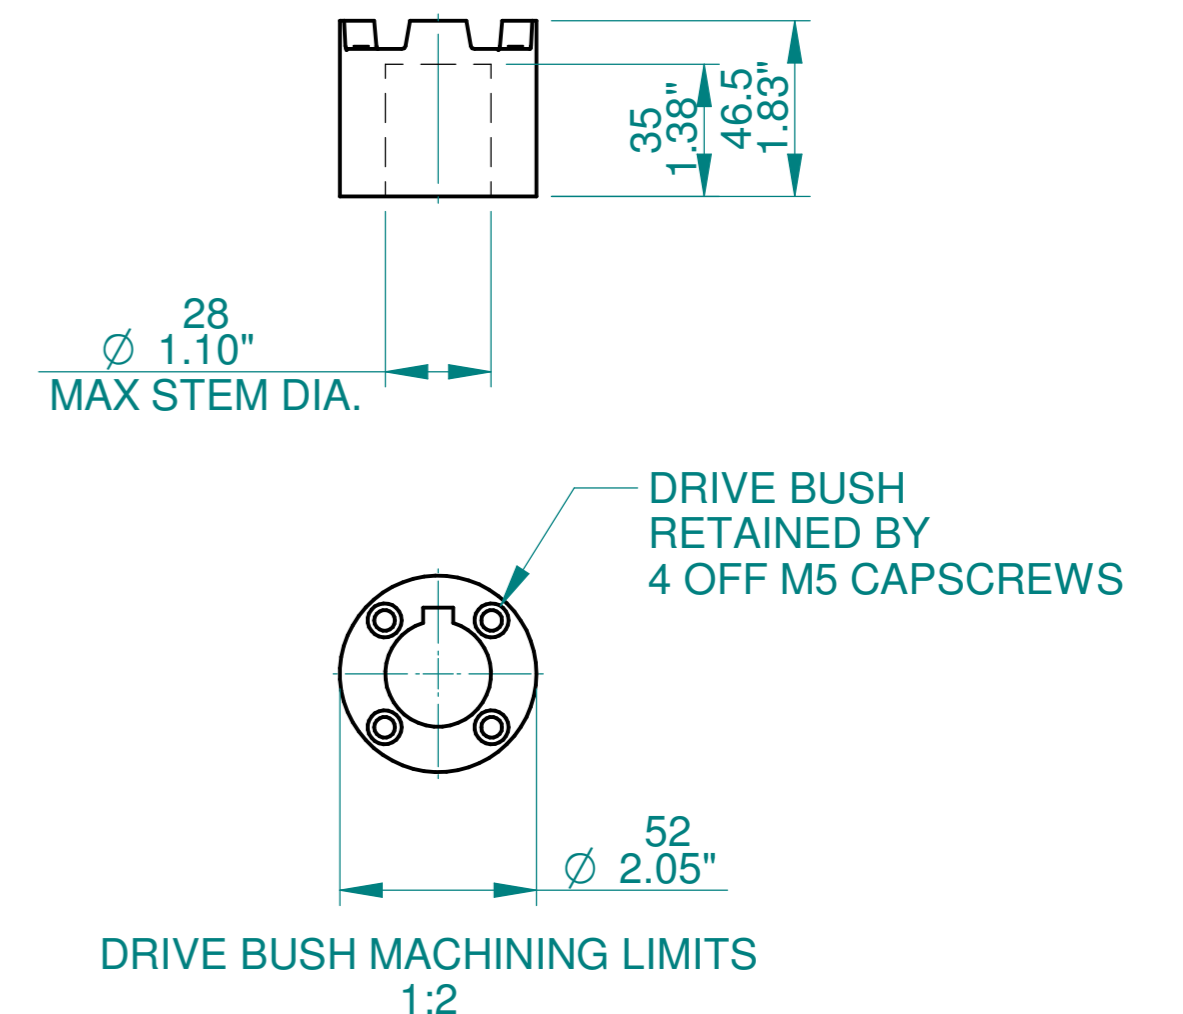

|              |                            |                                   |   |   |
|--------------|----------------------------|-----------------------------------|---|---|
| Scale<br>1:3 | Projection<br>Do Not Scale | Ref for 1:1 Scale<br>0 10 20 30mm | <b>rotork</b><br>Rotork Controls Limited<br>Bath, England BA1 3JQ<br>Telephone 01225-733200<br>Telefax 01225-333467<br>mail@rotork.co.uk<br>http://www.rotork.com | Title<br>CVQ1200 WITH MANUAL OVERRIDE - SPECIFICATION SHEET |
| A2           | Data Sheet                 | Issue No<br>3                     | Sheet No<br>1 of 1  | Drawn P.Johns<br>Checked M.Evans<br>Date 30-JAN-2011        |