



IECEX Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: IECEx SIR 16.0095X

Issue No: 0

Certificate history:

Issue No. 0 (2017-12-18)

Status: **Current**

Page 1 of 3

Date of Issue: **2017-12-18**

Applicant: **Rotork Fluid Systems**
9 Brown Lane West
Holbeck
Leeds LS12 6BH
United Kingdom

Equipment: **Electronic Line Break (ELB)**

Optional accessory:

Type of Protection: **Flameproof**

Marking:

Ex db II 1 T4 Gb
1 Can be either IIC or IIB as required
Ta = (- 2 °C to + 3 °C)
2 down to -50 °C, 3 up to 60 °C

Approved for issue on behalf of the IECEx
Certification Body:

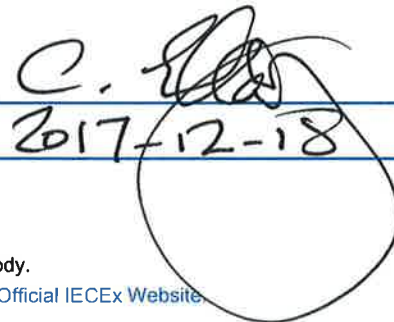
C Ellaby

Position:

Deputy Certification Manager

Signature:
(for printed version)

Date:


2017-12-18

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com)

Certificate issued by:

SIRA Certification Service
CSA Group
Unit 6, Hawarden Industrial Park
Hawarden, Deeside, CH5 3US
United Kingdom

sira
CERTIFICATION





IECEX Certificate of Conformity

Certificate No: IECEx SIR 16.0095X Issue No: 0
Date of Issue: 2017-12-18 Page 2 of 3
Manufacturer: **Rotork Fluid Systems**
9 Brown Lane West
Holbeck
Leeds LS12 6BH
United Kingdom

Additional Manufacturing location(s):

Rotork Controls Inc.
675 Mile Crossing Blvd
Rochester
New York 14624
United States of America

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The electrical apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

IEC 60079-0 : 2011 Explosive atmospheres - Part 0: General requirements
Edition:6.0
IEC 60079-1 : 2014-06 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"
Edition:7.0

*This Certificate **does not** indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.*

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:

[GB/SIR/ExTR17.0264/00](#)

Quality Assessment Report:

[GB/SIR/QAR06.0023/07](#) [GB/SIR/QAR07.0033/07](#)



IECEX Certificate of Conformity

Certificate No: IECEx SIR 16.0095X

Issue No: 0

Date of Issue: 2017-12-18

Page 3 of 3

Schedule

EQUIPMENT:

Equipment and systems covered by this certificate are as follows:

The Electronic Line Break (ELB) is a self-contained electronic pipeline monitoring system to continuously monitor pipeline dynamics and provide early detection of pipeline breaks and initiate automatic actuator movement to an emergency position based on user defined parameters.

The ELB comprises an electrical control and terminal enclosures attached via a common back housing casting.

The electrical enclosure is formed by a cover which connects to the back housing casting by means of a spigoted flamepath joint and is secured by four M8 capscrews. The electrical enclosure contains three monitoring and control PCBs and an optional networking system PCB. The electrical enclosure cover is provided with a toughened glass window potted into the end which permits viewing of an internal LCD device, and also has non-penetrative local controls mounted below the window.

The terminal enclosure is formed by a cover which connects to the back housing casting by means of a spigoted flamepath joint and is secured by three M5 capscrews. The terminal enclosure provides electrical field wiring terminals.

The back housing casting is manufactured in aluminium alloy and provides the back housing for the two enclosures, all of which are designed to satisfy the requirements for flameproof equipment. The back casting provides five threaded M25 entry facilities, one into the terminal enclosure and four into the electrical enclosure. The volumes of the terminal enclosure and the electrical enclosure are separated by a potted, cable feed-through bushing.

SPECIFIC CONDITIONS OF USE: YES as shown below:

1. This equipment shall be positioned such that risk of impact to the window is low.
2. This equipment includes external, non-metallic parts, including the outer protective coating; therefore, cleaning shall only be carried out with a damp cloth.
3. Refer to the Annexe for additional conditions

Annex:

[IECEX SIR 16.0095X Annexe Issue 0.pdf](#)

Annexe to: IECEx SIR 16.0095X Issue 0
Applicant: Rotork Fluid Systems
Apparatus: Electronic Line Break (ELB)



Additional Specific Conditions of Use

3. The fastener grades securing the cover are indicated in the table below, if these fasteners are replaced in service the correct fastener grade must be used.

Location	Fastener grade
Electrical cover/ back housing	Stainless steel A4-80
Terminal cover/ back housing	High tensile carbon steel 12.9

4. In accordance with clause 5.1 of IEC 60079-1, the critical dimensions of the flamepaths are:

Flamepath	Flamepath Dimension (mm)	
	Gap	Length
Electrical cover/ back housing	0.15	26.0
Terminal cover/ back housing	0.15	12.5
Cable feed through bush/back housing	0.15	25.0

Conditions of Manufacture

i. Each enclosure shall be subjected to a routine overpressure test in accordance with the tables below for the design option and ambient temperature range stated. In all cases the pressure shall be maintained for at least 10 s as required by clause 16 of IEC 60079-1. There shall be no permanent deformation or damage to the enclosure.

IIB Applications (below -20°C to -50°C) to +70°C

Equipment	Test Pressure	
	bar	lbf/in ²
Cable feedthrough bushing, Robnor Resins Ltd PX700/BK	19.49	282.68

This test may be conducted on a 'batch testing' basis in accordance with clause 16.6 of IEC 60079-1 if required.

IIC Applications (below -20°C to -50°C) to +70°C

Equipment	Test Pressure	
	bar	lbf/in ²
Back housing, electrical enclosure Aluminium Alloy to BS1490. Grade: LM25TF, heat treated(or equivalent)	26.67	216.98
Electrical Cover Window Borosilicate or Soda lime toughened to BS EN 12150 Loctite ® 5615	26.67	216.98
Cable feedthrough bushing, Robnor Resins Ltd PX700/BK	26.67	216.98