



Keeping the World Flowing
for Future Generations



Model 85D Multi-Stage Biasing Relay

Features and Benefits

- 2 Stage pilot operation allows precise control of set points
- 14 SCFM flow capacity in a small size unit
- Low air consumption preserves air and other costly gases
- Compact size permits installation where space is limited
- Available in 1/8", 1/4" and 3/8" port sizes

Operating Principles

The Model 85D Multi-Stage Biasing Relay is a precision control combining the sensitivity of a precision pressure regulator with positive biasing capability. This compact, pilot-operated device offers unusually high output capacity with minimal air consumption, while providing excellent protection against supply or output pressure variation.

The versatile Model 85D is recommended for use in systems requiring precision pressure maintenance and instrument biasing, in dead end service and instrument panel supply applications.

The basic mathematical expression for the Model 85D is $PO = PS + K$ where PO is output pressure, PS is signal pressure and K is the spring constant.

Specifications

Maximum Supply Pressure

- 250 psig, [17.5 BAR], (1750 kPa)

Recommended Operating Supply Pressure

- 150 psig, [10 BAR], (1000 kPa)

Maximum Signal or Output Pressure

- 150 psig, [10 BAR], (1000 kPa)

Flow Capacity

- 14 SCFM (23.8 m³/HR) @ 100 psig, [7.0 BAR], (700 kPa) supply, 20 psig, [1.5 BAR], (150 kPa) setpoint

Exhaust Capacity

- 2.5 SCFM (4.25 m³/HR) where downstream pressure is 5 psig, [.35 BAR], (35 kPa) above setpoint

Supply Pressure Effect

- Less than 0.2 psig, [.014 BAR], (1.4 kPa) for 100 psig, [7.0 BAR], (700 kPa) change in supply pressure

Pressure Change under Flow Conditions

- Less than 0.1 psig, [.007 BAR], (0.7 kPa) from dead end service to 10 SCFM (17 m³/HR) (Set pressure 10 psig, [.7 BAR], (70 kPa), supply pressure 100 psig, [7.0 BAR], (700 kPa))

Air Consumption

- Less than .1 SCFM (.17 m³/HR)


Ambient Temperature

- -40 to +200 °F, (-40 to 93.3 °C)

Materials of Construction

- Body: Aluminum
Trim: Aluminum, Stainless Steel, Brass
Diaphragms: Buna N on Dacron

Dimensions

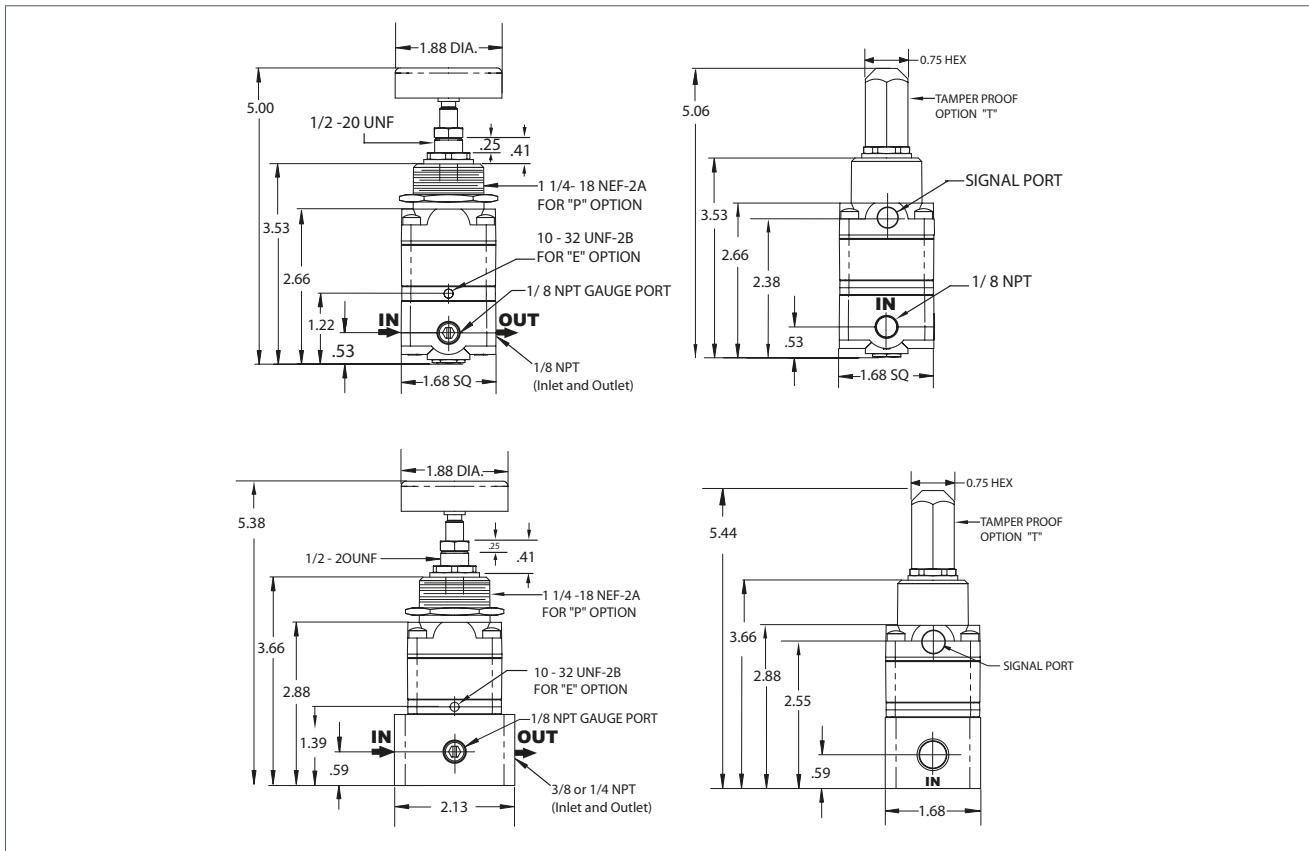

Product Code

856 3 1 E

Pressure Range

psig	[BAR]	(kPa)
3 = 0-20	[0-1.5]	(0-150)
4 = 1-60	[0.1-4.0]	(10-400)
5 = 1-100	[0.1-7.0]	(10-700)

Pipe Size

1 = 1/8" NPT
2 = 1/4" NPT
3 = 3/8" NPT

Options

E = Tapped Exhaust
P = Bonnet Mounting
T = Tamper Proof
U = BSPT (Tapered)

Service Kit

A Service Kit is available for the Model 85D Multi-Stage Biasing Relay, refer to the *Installation, Operation and Maintenance Instructions, IS-3000085D*.

A full listing of the Rotork sales and service network is available on our website.

www.rotork.com

Rotork plc, Bath, UK
tel +44 (0)1225 733200
email mail@rotork.com

Fairchild Industrial Products
3920 West Point Blvd
Winston-Salem, NC 27103
tel +1 (336) 659-3400
fax +1 (336) 659-9323
email: US-VS-CS@Rotork.com

rotork®

Electric Actuators and Control Systems
Fluid Power Actuators and Control Systems
Gearboxes and Gear Operators
Precision Control and Indication
Projects, Services and Retrofit